

TEST REPORT

Applicant Name: Huizhou Dudu Pet Products Co., Ltd
Address: Floor 2/3/ 4, Building 2 District D Qiaosheng Industrial Park,
Lilin Town, Huicheng District, Huizhou, China
Report Number: 2401V60286E-EM-00

Test Standard (s)

FCC Part 15, Subpart B (Class B)

Sample Description

Product Type: Automatic Pet Feeder
Model No.: DU-F03V
Multiple Model(s) No.: DU-F03V-01/DU-F03V-02/DU-F03K-01/DU-F03K-02/DU-F03B-01/DU-F03B-02
Trade Mark: N/A
Date Received: 2024/07/09
Issue Date: 2024/08/09

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Haiguo Li
EMC Engineer

Approved By:



Moon Liu
EMC Supervisor

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.107 - AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	11
LEVEL & OVER LIMIT CALCULATION	11
TEST DATA	11
FCC §15.109 - RADIATED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
LEVEL & OVER LIMIT CALCULATION	16
TEST DATA	16
EXHIBIT A - EUT PHOTOGRAPHS.....	25
EXHIBIT B - TEST SETUP PHOTOGRAPHS	26
CONDUCTED EMISSIONS - FRONT VIEW	26
CONDUCTED EMISSIONS - SIDE VIEW	26
RADIATED EMISSIONS - FRONT VIEW (BELOW 1 GHz)	27
RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....	27
RADIATED EMISSIONS - FRONT VIEW (ABOVE 1 GHz)	28
RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz).....	28
RADIATED EMISSIONS - VIEW (BELOW 1 GHz).....	29
RADIATED EMISSIONS - VIEW (ABOVE 1 GHz).....	29
EXHIBIT C - PRODUCT SIMILARITY DECLARATION OF LETTER	30

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401V60286E-EM-00	Original Report	2024/08/09

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Automatic Pet Feeder
Tested Model	DU-F03V
Multiple Model(s)	DU-F03V-01/DU-F03V-02/DU-F03K-01/DU-F03K-02/DU-F03B-01/DU-F03B-02
Voltage Range	DC 5V or DC 4.5V from battery
Highest operating frequency [#]	5.25GHz
Equipment Class	Class B
Sample number	2O6D-1+2O6D-2+2O6D-3+2O6D-4+2O6D-5+2O6D-6 (Assigned by BAACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: TPA-46B050100UU Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 1000mA
Note: The Multiple models are electrically identical with the test model except for model name and sales channel. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~200MHz	Horizontal	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz	Vertical	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Horizontal	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Vertical	5.05dB(k=2, 95% level of confidence)
	1GHz~6GHz	/	5.35dB(k=2, 95% level of confidence)
	6GHz~18GHz	/	5.44dB(k=2, 95% level of confidence)
	18GHz~40GHz	/	5.16dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in worst case condition.

Test Mode 1: working (powered by the adaptor)

Test Mode 2: working (powered by batteries)

EUT exercise software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OUPU	SOCKET	PDU-OP1606K	6971041358020
TPLINK	WIRELESS ROUTER	AC750	221C6D5003204
FOSCAM	Adapter1	SAW12F-120-1000G	/
apple	IPHONE13	A2634	35 024433 125600 8

External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded un-detachable AC cable	1.0	Socket	LISN
Unshielded un-detachable USB cable	1.5	adapter	EUT

Block Diagram of Test Setup

Test Mode 1

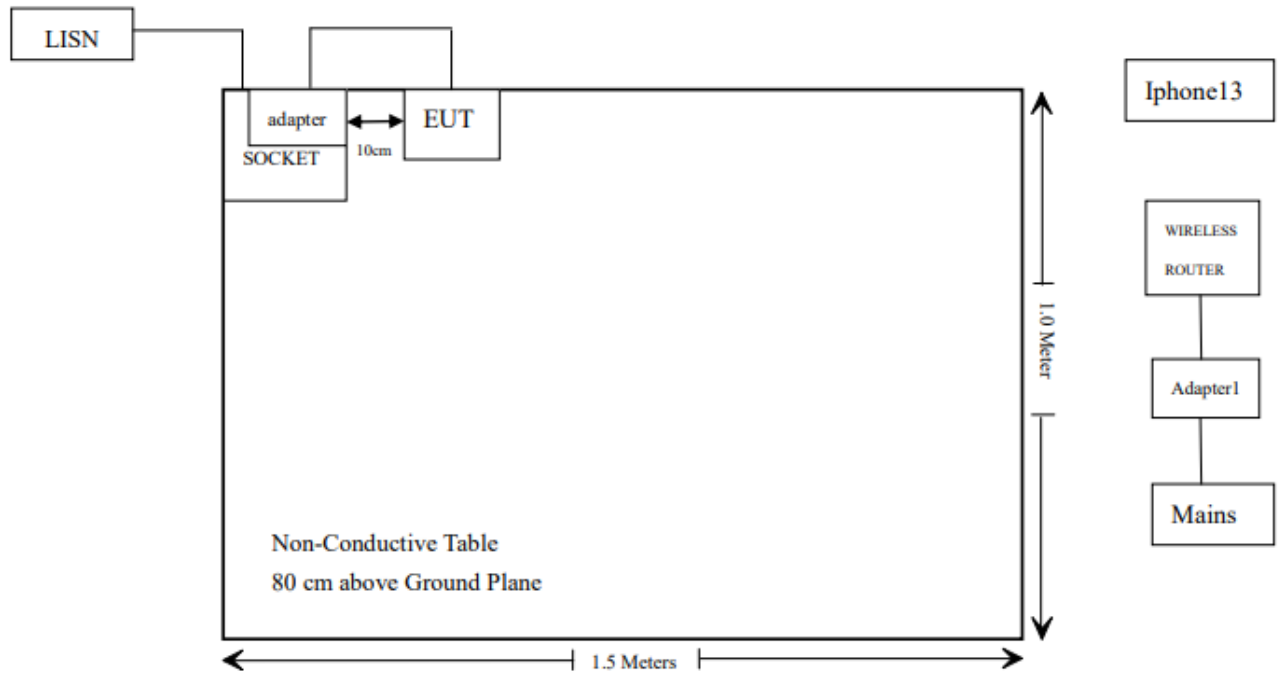

Test Mode 2

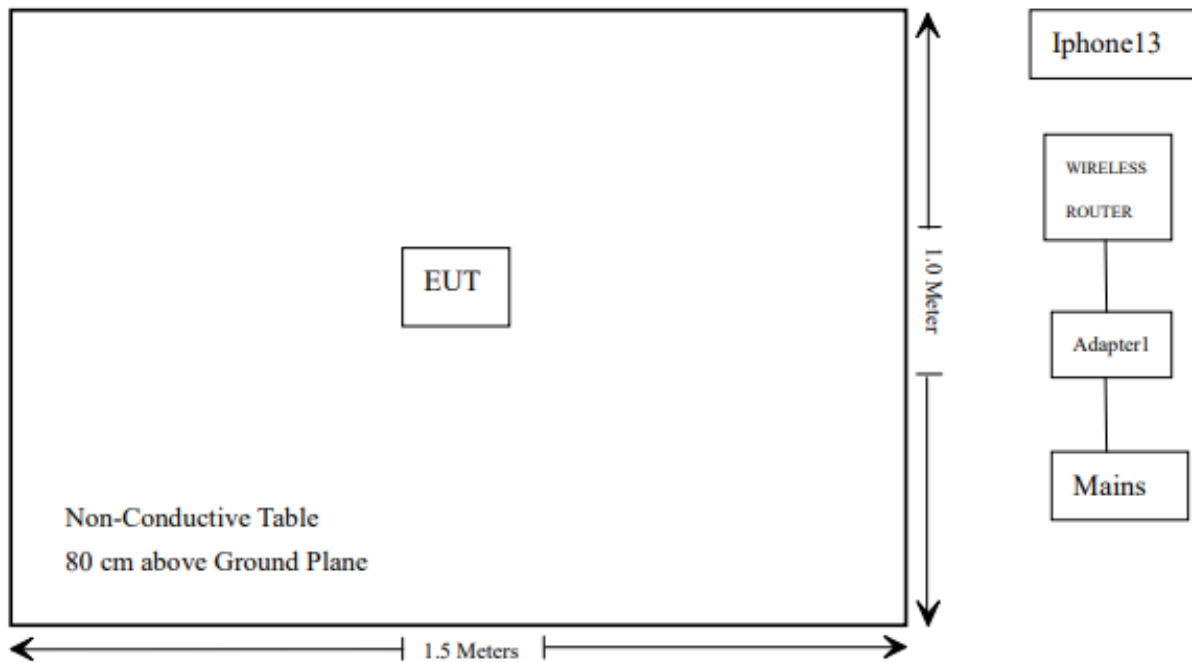

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107

EUT Setup

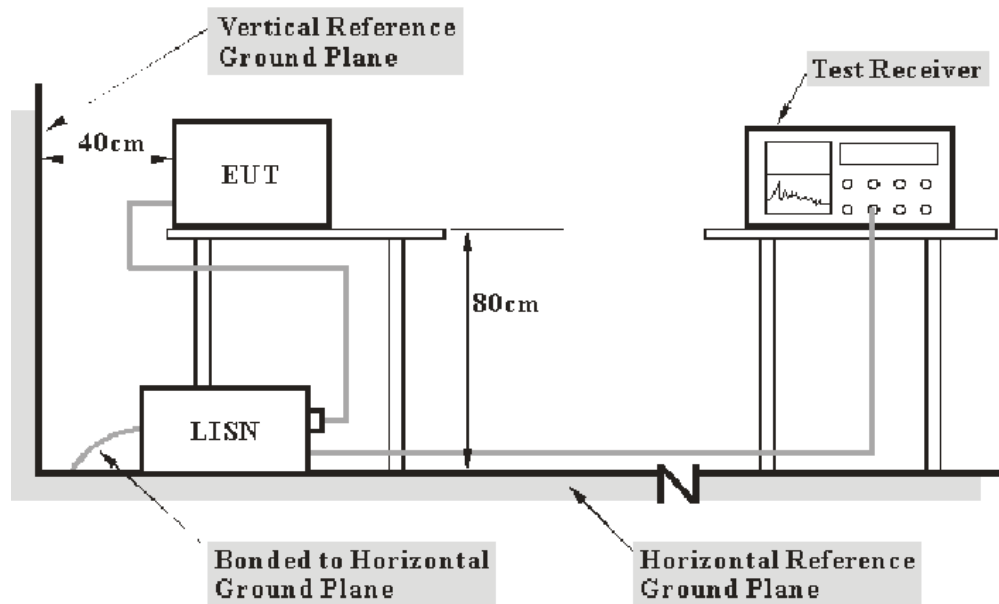

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

$$\text{Level (dBuV)} = \text{Read Level (dBuV)} + \text{LISN Factor} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit.

$$\text{Over Limit (dB)} = \text{Level (dBuV)} - \text{Limit Line (dBuV)}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101 kPa

The testing was performed by Haiguo Li on 2024-07-14.

Test Mode 1


AC 120V/60 Hz, Line

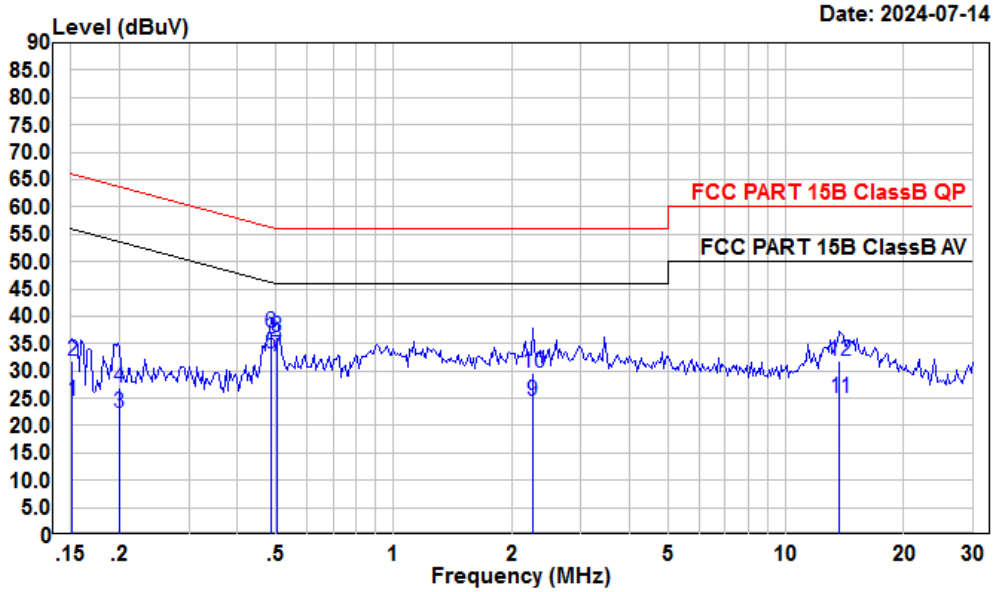

Condition: Line
 Project : 2401V60286E-EM
 test Mode: working(powered by the adaptor)
 tester : haiguoli

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	3.47	24.50	10.90	10.13	55.91	-31.41	Average
2	0.15	10.78	31.81	10.90	10.13	65.91	-34.10	QP
3	0.20	1.45	22.34	10.80	10.09	53.62	-31.28	Average
4	0.20	6.17	27.06	10.80	10.09	63.62	-36.56	QP
5	0.49	12.47	33.11	10.51	10.13	46.23	-13.12	Average
6	0.49	16.29	36.93	10.51	10.13	56.23	-19.30	QP
7	0.50	12.11	32.75	10.50	10.14	46.00	-13.25	Average
8	0.50	15.42	36.06	10.50	10.14	56.00	-19.94	QP
9	2.26	3.79	24.52	10.55	10.18	46.00	-21.48	Average
10	2.26	8.94	29.67	10.55	10.18	56.00	-26.33	QP
11	13.70	4.26	25.08	10.60	10.22	50.00	-24.92	Average
12	13.70	10.90	31.72	10.60	10.22	60.00	-28.28	QP

AC 120V/60 Hz, Neutral

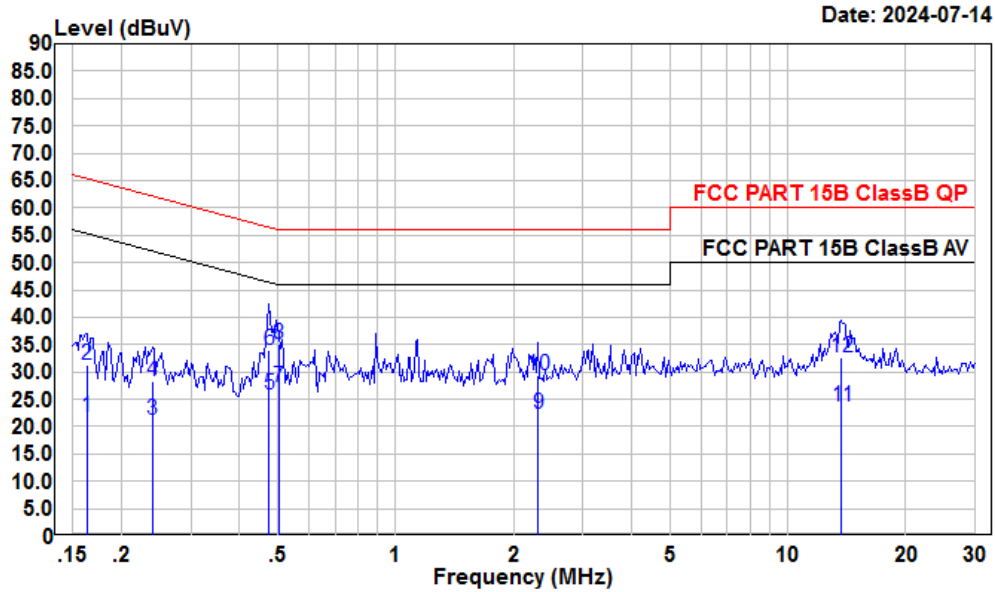

Condition: Neutral
 Project : 2401V60286E-EM
 test Mode: working(powered by the adaptor)
 tester : haiguoli

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	1.10	21.75	10.54	10.11	55.30	-33.55	Average
2	0.16	10.59	31.24	10.54	10.11	65.30	-34.06	QP
3	0.24	0.62	21.16	10.46	10.08	52.13	-30.97	Average
4	0.24	7.85	28.39	10.46	10.08	62.13	-33.74	QP
5	0.48	5.07	25.88	10.68	10.13	46.41	-20.53	Average
6	0.48	13.27	34.08	10.68	10.13	56.41	-22.33	QP
7	0.50	6.34	27.18	10.70	10.14	46.00	-18.82	Average
8	0.50	14.15	34.99	10.70	10.14	56.00	-21.01	QP
9	2.31	1.62	22.20	10.40	10.18	46.00	-23.80	Average
10	2.31	8.87	29.45	10.40	10.18	56.00	-26.55	QP
11	13.70	2.68	23.70	10.80	10.22	50.00	-26.30	Average
12	13.70	11.72	32.74	10.80	10.22	60.00	-27.26	QP


FCC §15.109 - RADIATED EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup


Below 1GHz for Radiated Emissions

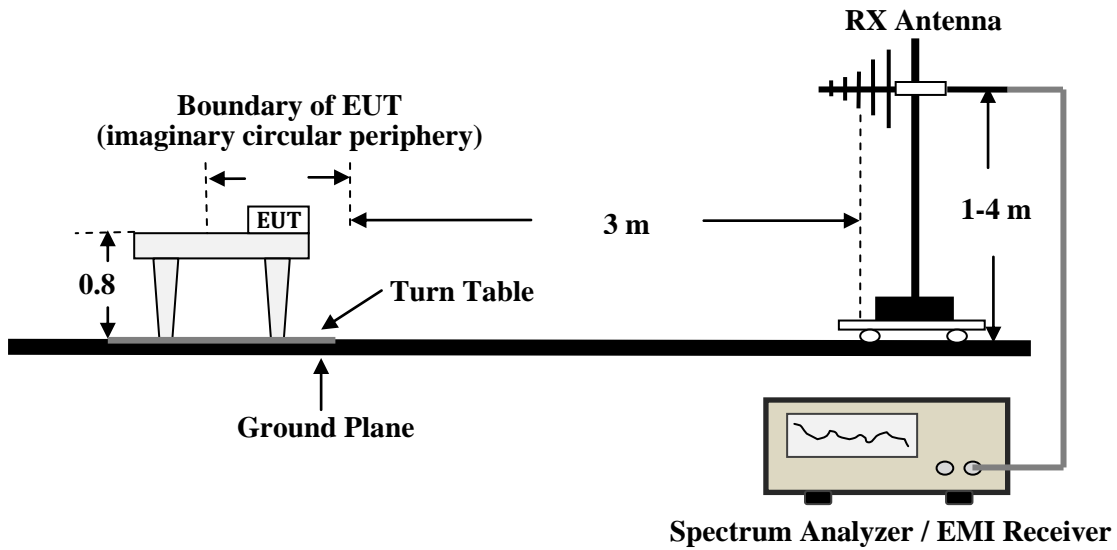

Above 1GHz for Radiated Emissions

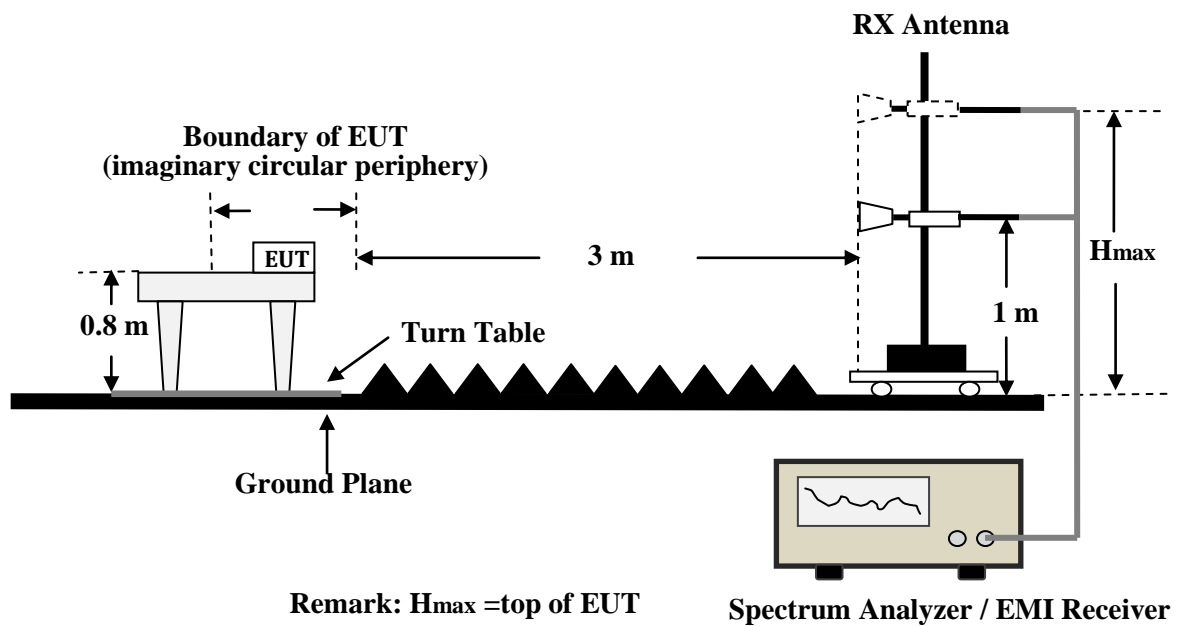

Radiated Emissions Setup Configuration

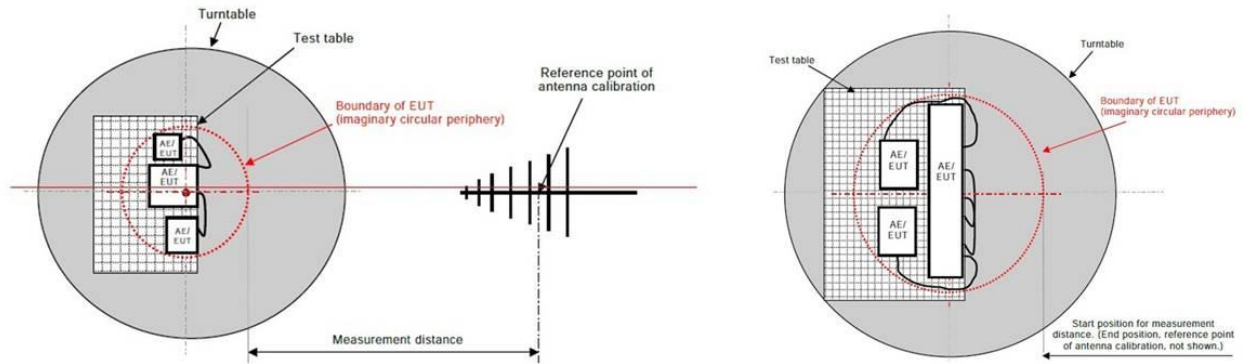

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If emission level of the EUT in Peak measurement mode is 20dB lower than peak limit line (that means the emission level in Peak measurement mode complies with both Peak and average limit lines) then only Peak measurement result is reported .Otherwise, Emission in average measurement mode shall be measured, and reported for frequency range above 1GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class B. The equation for Over Limit calculation is as follows:

$$\text{Over limit} = \text{Level} - \text{Limit}$$

Test Data

Environmental Conditions


Temperature:	25~26 °C
Relative Humidity:	50~56 %
ATM Pressure:	101 kPa

The testing was performed by Shy Jiang on 2024-07-22 for below 1GHz and Zenos Qiao on 2024-07-30 for above 1GHz.

Test Mode 1

30 MHz~1 GHz


Horizontal

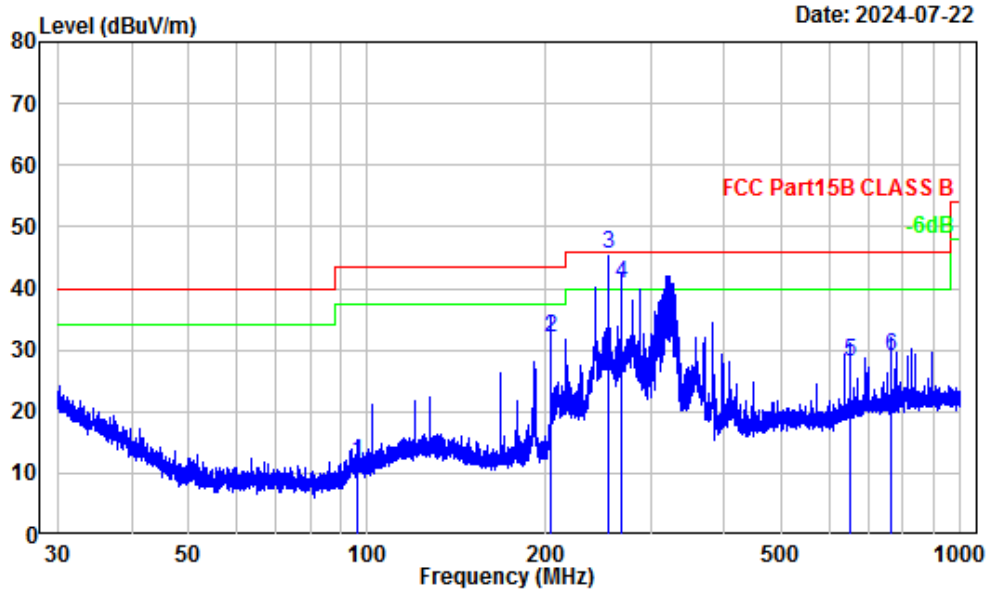

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401V60286E-EM
 Test Mode : working(powered by the adaptor)
 Tester : Shy Jiang

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	95.97	-16.51	28.27	11.76	43.50	-31.74	QP
2	203.97	-13.57	45.66	32.09	43.50	-11.41	QP
3	254.95	-14.35	59.89	45.54	46.00	-0.46	QP
4	267.78	-13.90	54.80	40.90	46.00	-5.10	QP
5	650.23	-6.73	34.85	28.12	46.00	-17.88	QP
6	765.05	-5.47	34.40	28.93	46.00	-17.07	QP

Vertical

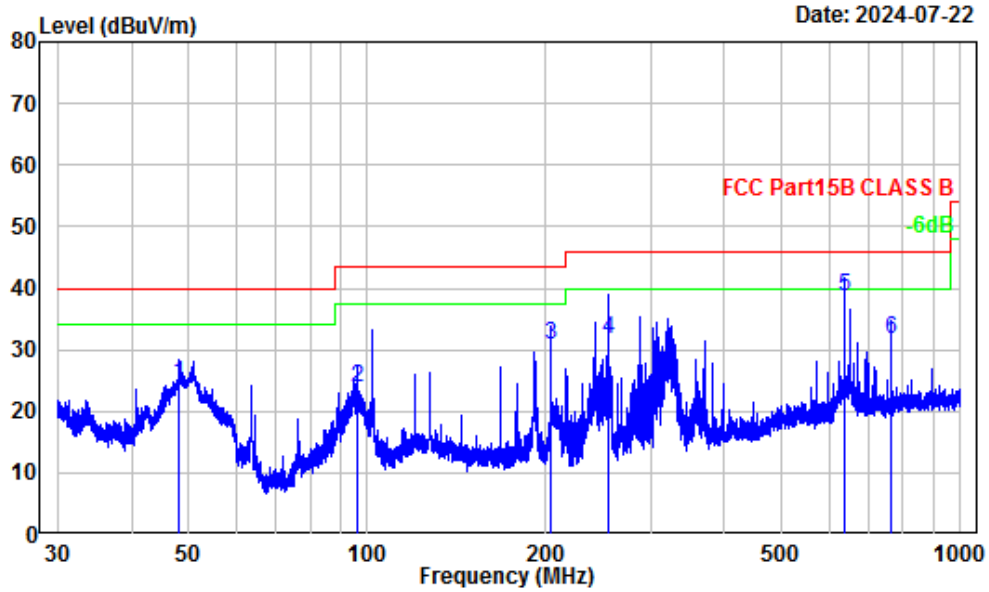


Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401V60286E-EM
 Test Mode : working(powered by the adaptor)
 Tester : Shy Jiang

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.97	-17.49	41.81	24.32	40.00	-15.68	QP
2	96.01	-17.72	41.71	23.99	43.50	-19.51	QP
3	204.06	-14.71	45.51	30.80	43.50	-12.70	QP
4	254.95	-14.75	46.59	31.84	46.00	-14.16	QP
5	637.53	-7.40	46.13	38.73	46.00	-7.27	QP
6	765.05	-5.85	37.59	31.74	46.00	-14.26	QP

1 ~ 30 GHz


Horizontal

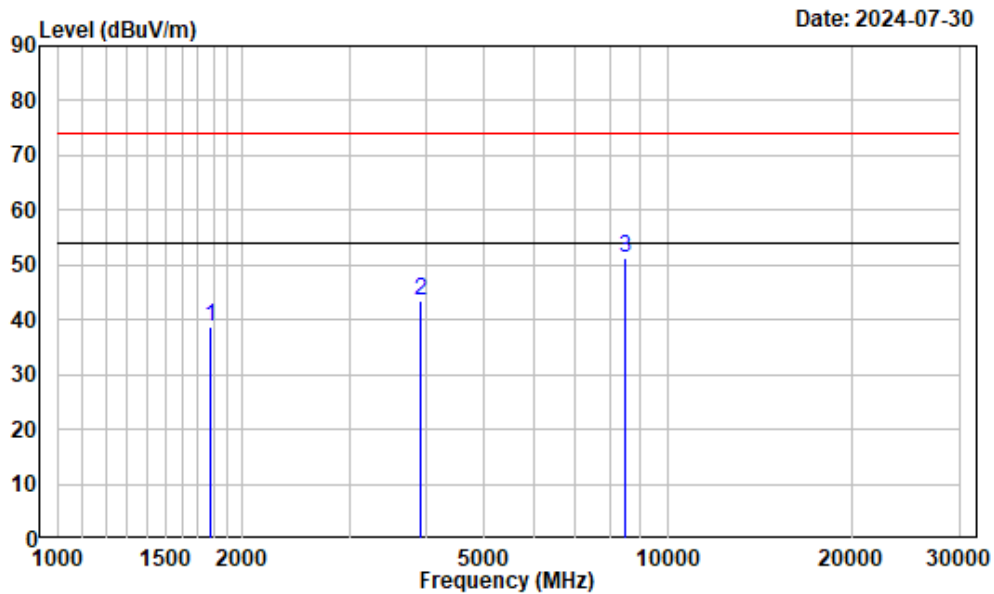

Site : chamber B
 Condition : Horizontal
 Project No.: 2401V60286E-EM
 Tester : Zenos Qiao
 Test Mode : Working(powered by the adaptor)

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1784.313	-6.41	45.04	38.63	74.00	-35.37	Peak
2	3927.219	-0.33	43.70	43.37	74.00	-30.63	Peak
3	8502.375	10.52	40.89	51.41	74.00	-22.59	Peak

Vertical

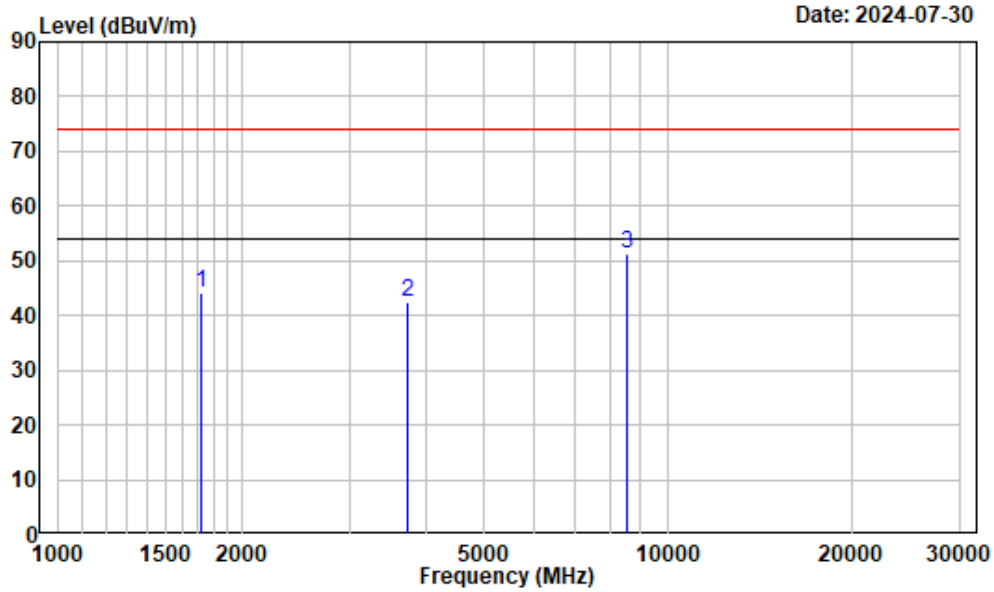


Site : chamber B
 Condition : Vertical
 Project No.: 2401V60286E-EM
 Tester : Zenos Qiao
 Test Mode : Working(powerd by the adaptor)

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1721.156	-6.59	50.70	44.11	74.00	-29.89	Peak
2	3727.469	-1.01	43.50	42.49	74.00	-31.51	Peak
3	8542.031	10.69	40.72	51.41	74.00	-22.59	Peak

Test Mode 2

30 MHz~1 GHz


Horizontal

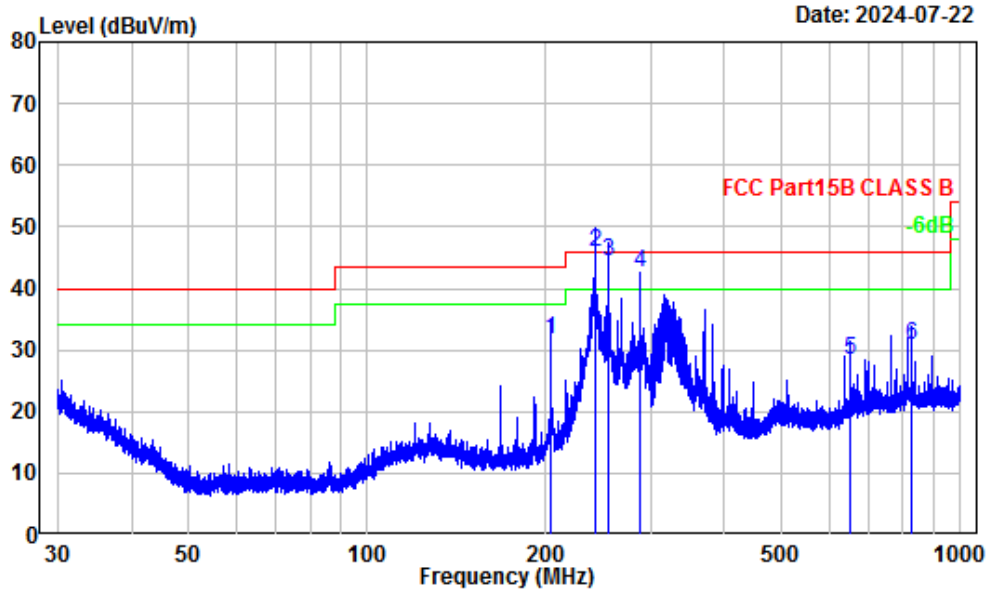

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401V60286E-EM
 Test Mode : working (powered by batteries)
 Tester : Shy Jiang

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	203.97	-13.57	45.15	31.58	43.50	-11.92	QP
2	242.21	-14.36	60.25	45.89	46.00	-0.11	QP
3	254.95	-14.35	58.64	44.29	46.00	-1.71	QP
4	287.99	-13.19	55.63	42.44	46.00	-3.56	QP
5	650.23	-6.73	35.20	28.47	46.00	-17.53	QP
6	828.95	-5.02	35.75	30.73	46.00	-15.27	QP

Vertical

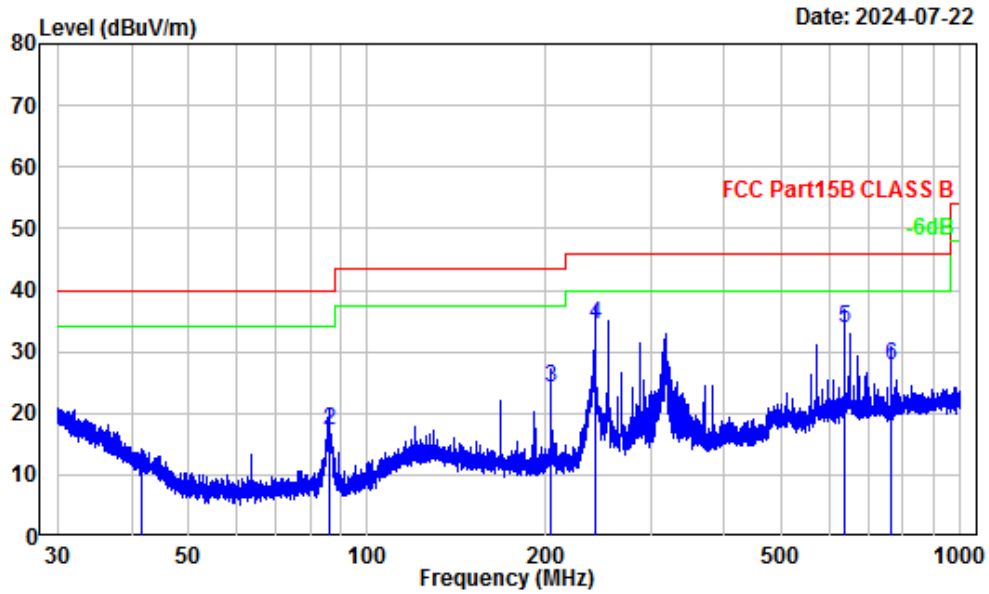


Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401V60286E-EM
 Test Mode : working (powered by batteries)
 Tester : Shy Jiang

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.66	-13.96	24.27	10.31	40.00	-29.69	QP
2	86.20	-18.83	36.13	17.30	40.00	-22.70	QP
3	203.97	-14.71	38.78	24.07	43.50	-19.43	QP
4	242.21	-14.89	49.22	34.33	46.00	-11.67	QP
5	637.53	-7.40	41.31	33.91	46.00	-12.09	QP
6	765.05	-5.85	33.62	27.77	46.00	-18.23	QP

1 ~ 30 GHz


Horizontal

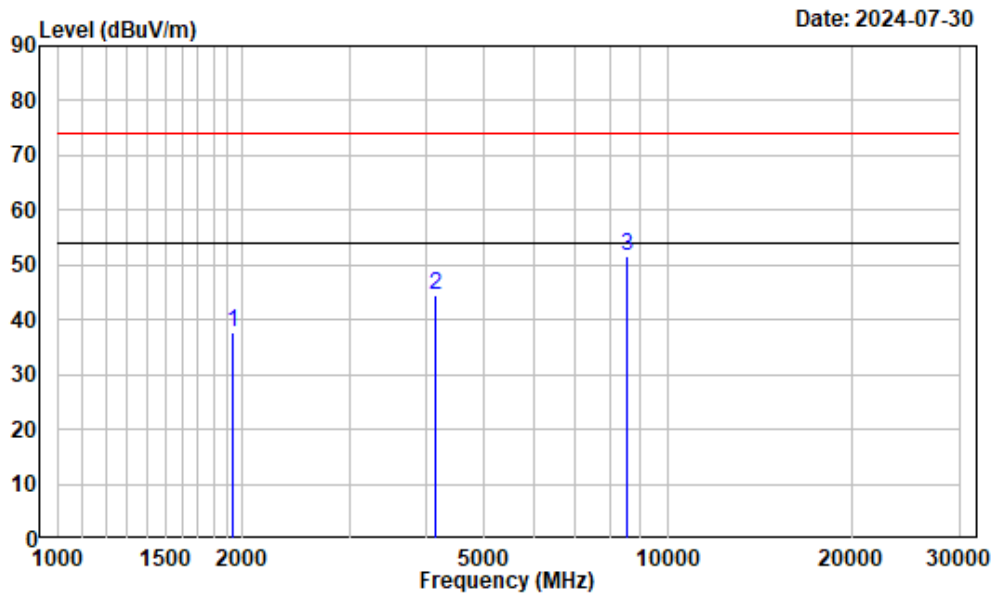

Site : chamber B
 Condition : Horizontal
 Project No.: 2401V60286E-EM
 Tester : Zenos Qiao
 Test Mode : Working (powered by batteries)

	Freq	Factor	Read Level	Read Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1931.188	-5.90	43.50	37.60	74.00	-36.40	Peak
2	4156.344	0.30	44.28	44.58	74.00	-29.42	Peak
3	8550.844	10.72	40.74	51.46	74.00	-22.54	Peak

Vertical

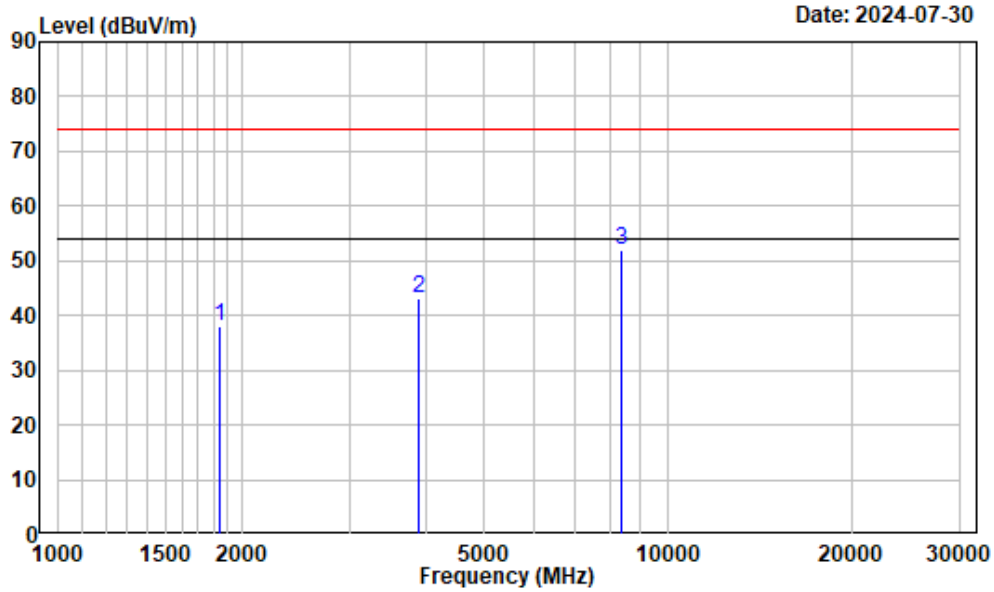

Site : chamber B
 Condition : Vertical
 Project No.: 2401V60286E-EM
 Tester : Zenos Qiao
 Test Mode : Working (powered by batteries)

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	1847.469	-6.35	44.42	38.07	74.00	-35.93 Peak
2	3887.563	-0.59	43.79	43.20	74.00	-30.80 Peak
3	8343.750	9.89	42.23	52.12	74.00	-21.88 Peak


EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the report number is 2401V60286E-EUT.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Test Mode 1


Conducted Emissions - Front View

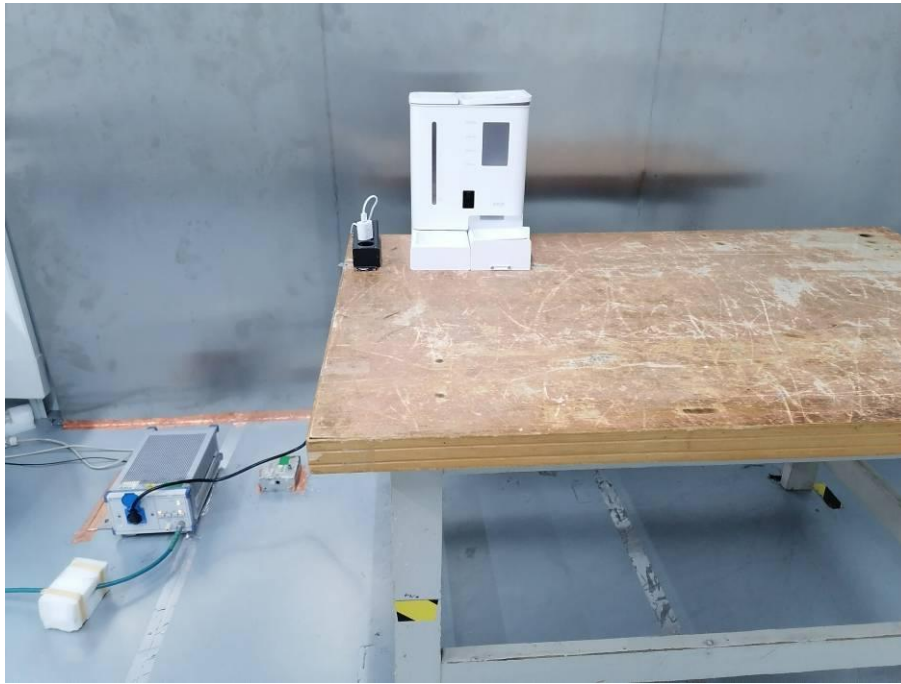

Conducted Emissions - Side View



Radiated Emissions - Front View (Below 1 GHz)

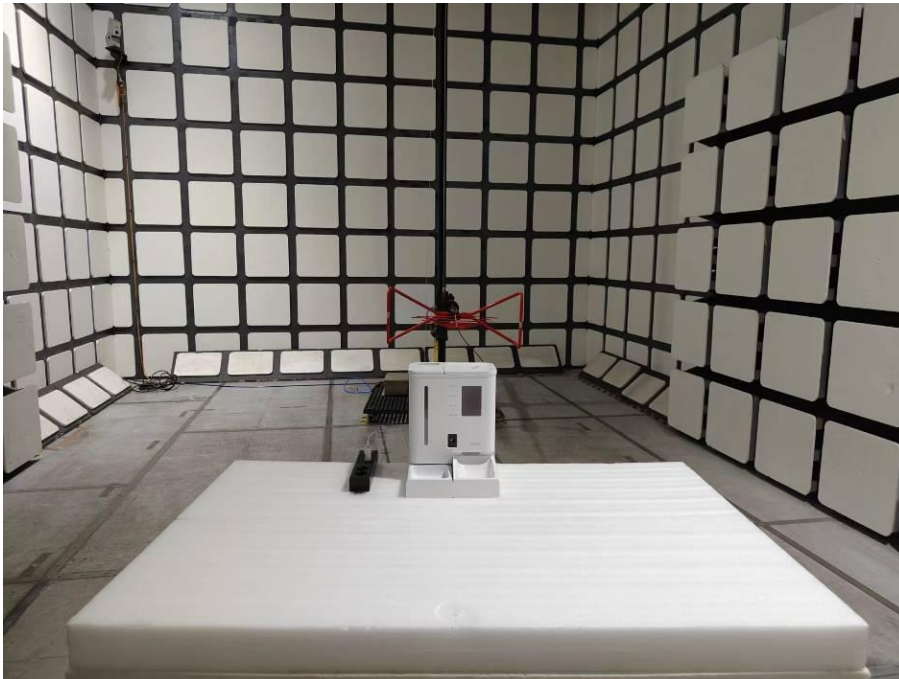


Radiated Emissions - Rear View (Below 1 GHz)



Radiated Emissions - Front View (Above 1 GHz)



Radiated Emissions - Rear View (Above 1 GHz)

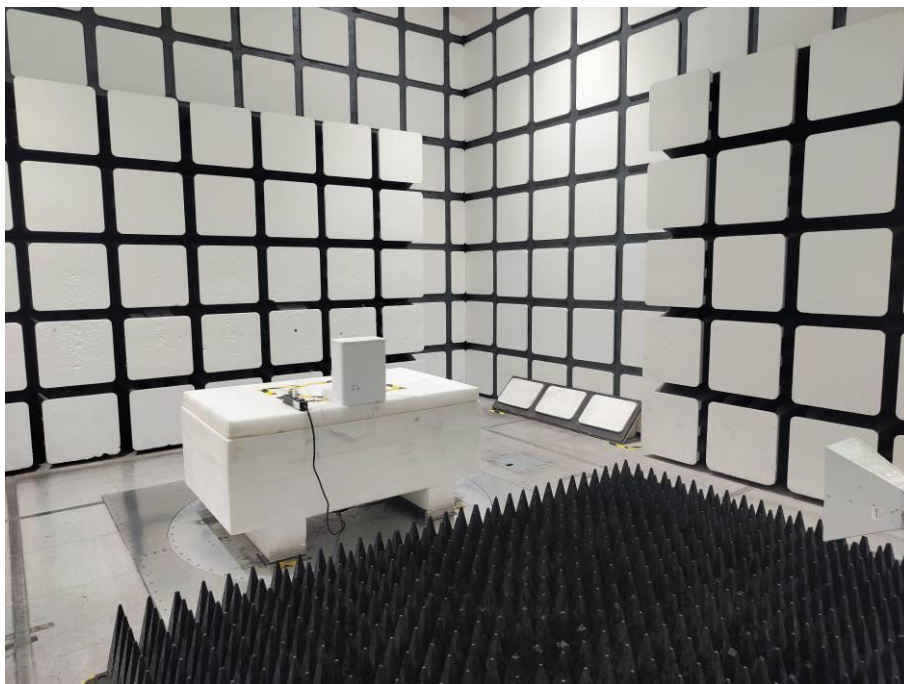

Test Mode 2

Radiated Emissions - View (Below 1 GHz)



Radiated Emissions - View (Above 1 GHz)

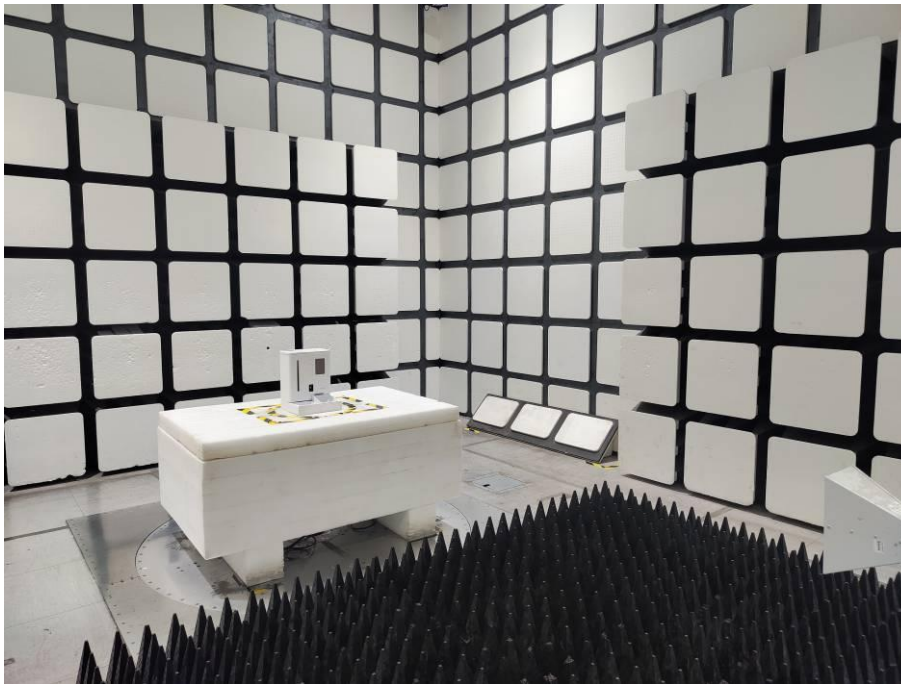


EXHIBIT C - PRODUCT SIMILARITY DECLARATION OF LETTER

Applicant: Huizhou Dudu Pet Products Co., Ltd
Address: Floor 2/3/ 4, Building 2 District D Qiaosheng Industrial Park, Lilin Town,
Huicheng District, Huizhou, China
Tel.:+86 18124747060
E-mail:sales1@dudupets.com

Product Similarity Declaration

Date: 2024-08-2


To:
FEDERAL COMMUNICATIONS COMMISSIONS
Authorization and Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

Dear Sir or Madam,

We Huizhou Dudu Pet Products Co., Ltd hereby declare that we have a product named Automatic Pet Feeder (Model number: DU-F03V) was tested by Bay Area Compliance Laboratories Corp. (Shenzhen). Meanwhile, for our marketing purpose, we would like to list a series models (DU-F03V-01/DU-F03V-02/DU-F03K-01/DU-F03K-02/DU-F03B-01/DU-F03B-02) on reports and certificate. All of the models are electrically identical, but the difference between them is the model name and sales channel.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact with me if you have any question.

Sincerely Yours,

Signature: 

ANN HU
Human Resources Specialist

******* END OF REPORT *******